


GEN III VVT

WITH
WIRELESS THERMOSTATS

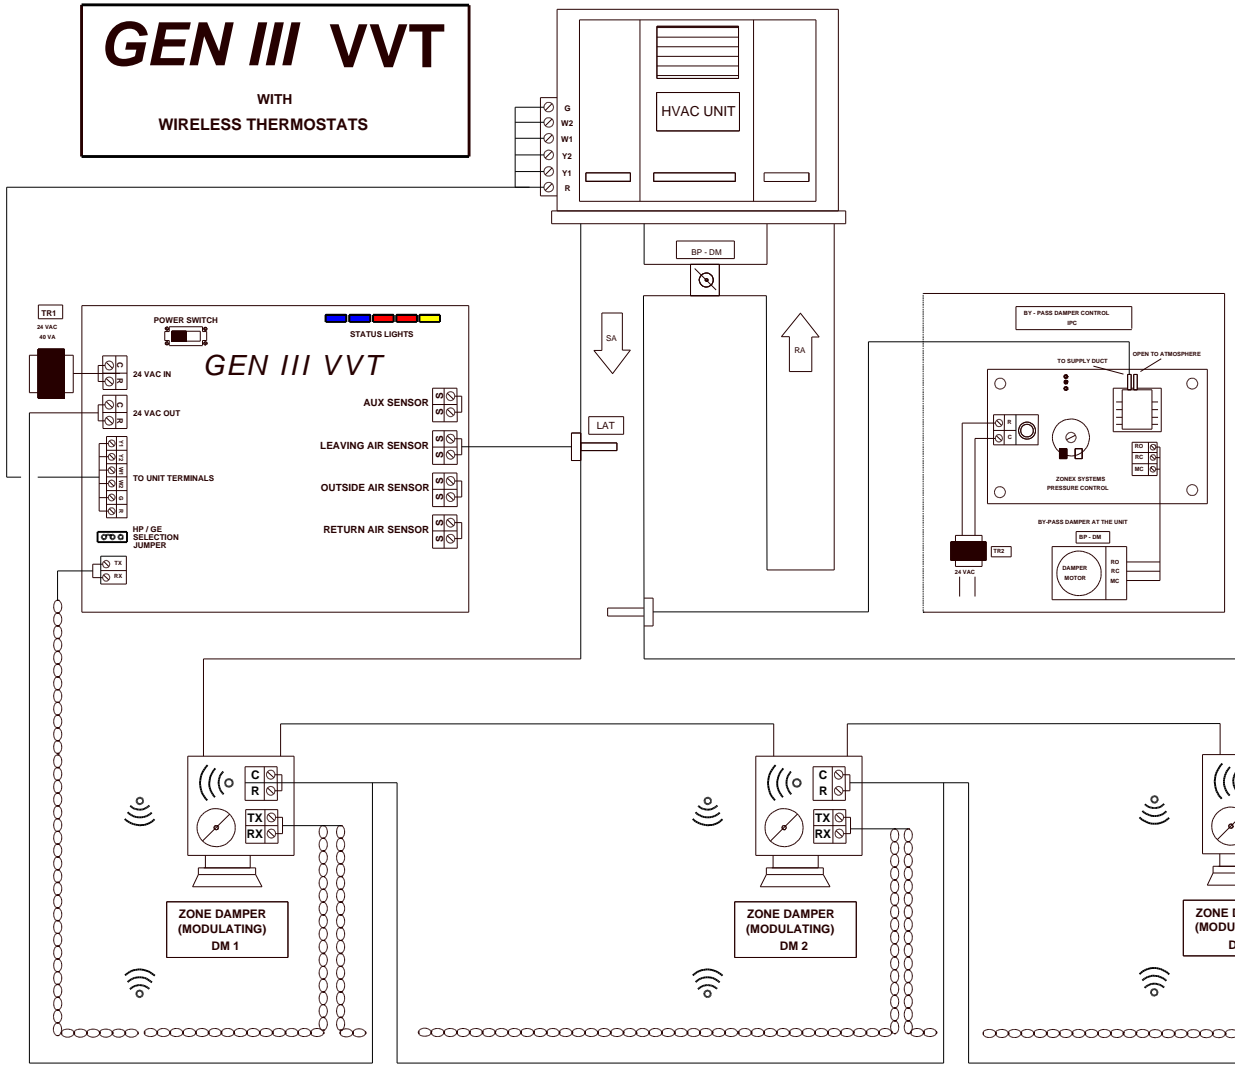

DEVICE	ID	DESCRIPTION
CONTROL BOARD	C1	GEN III CONTROLLER CONTROLS 2 - 20 ZONE DAMPERS ONLY 1 40 VA TRANSFORMER POWERS ALL SUPPLY DAMPERS
THERMOSTAT	T1 to T20	ZONEX WIRELESS STAT
ZONE DAMPER MOTOR	DM1	SUPPLIED WITH ZONEX DAMPER
ZONE DAMPER TRANSFORMER	TR1	1 40 VA / 24 VAC TRANSFORMER (2 VA PER ZONE DAMPER MOTOR)
BY-PASS TRANSFORMER	TR2	INDEPENDENT 40 VA / 24 VAC TRANSFORMER TO POWER THE BY-PASS DAMPER
LAT DISCHARGE SENSOR	LAT	LOCATE IN UNIT DISCHARGE BEFORE ANY DUCTWORK CONNECTION
SYSTEM BY-PASS DAMPER	BD - DM	CONNECT BETWEEN SUPPLY AND RETURN DUCTS BEFORE ANY TAKE OFF
COMMUNICATIONS LINK	COM LINK	TWISTED PAIR WIRING - BELDEN 8740 DAISY CHAIN STAT TO STAT
INTEGRATED STATIC PRESSURE CONTROL	IPC	LOCATE AFTER BY-PASS DAMPER, BEFORE ANY DUCT WORK TAKE OFF
BY - PASS DAMPER MOTOR	BP - DM	SUPPLIED WITH ZONEX (BY - PASS) DAMPER

VISIT OUR ON-LINE CATALOG AT ZONEXPRODUCTS.COM
FOR PERSONAL ASSISTANCE CALL 800 228 2966

DAISY CHAIN 24 VAC
AND
DATALINK CABLE
(BELDEN 8740)
TO ALL ZONE DAMPERS
EXPANDABLE TO 20 ZONES

