


SUBMITTAL

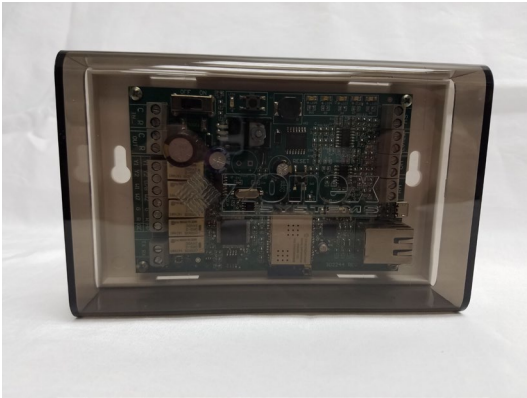

GEN UC Wi-Fi Mobile App based Communicating Controller with BACnetIP To Support Stand Alone Equipment

DESCRIPTION

The GEN UC (Part# GENUC) is a microprocessor based, digital communicating controller designed to communicate, and control standalone G/E or HP units, either RTU or split type systems remotely over the internet. The GEN UC can communicate & control up to 20 SATouchX thermostats and supports "ADR" (Automated Demand Response). Communications hub is APP based and accessed via mobile phone, tablets, or the internet. GEN UC is native BACnet compliant allowing for seamless integration with BAS systems.

The GEN UC is expandable using up to 20 add-on GEN UC-RM controllers that are daisy chained together via the (RS485) communications loop.

Each GEN UC RM supports up to 20 additional standalone units providing support and control of up to 400 thermostats in an expanded system.

The SATouchX thermostat is a universal multi-stage standalone communicating thermostat for direct control of Gas Electric and Heat Pump systems. The SATouchX is hard wired to the unit and communicates back to the GEN UC via the RS-485 communication link. Each SATouchX is equipped with Return Air/Supply Air and relative humidity sensors, these sensors are for informational purposes only.

The GEN UC is powered with one 24V 100VA transformer, which also powers all the SATouchX thermostats. Power from the controller, along with a 2-wire plenum rated twisted pair communications wire, is daisy chained from SATouchX to SATouchX to streamline installation and system communications.

TECHNICAL DATA

Electrical:

Supply Voltage: 24vac

Power consumption: 0.7 VA

Inputs: 24vac

RS-485 communication terminal

Outputs: 24vac

Fuse protection: Use Fused Transformer

Environmental:

Operating temperature: 32° to 160° F (0° to 71° C)

Operating humidity: 10-95%, non-condensing

Storage temperature: 0° to 160° F (-18° to 71° C)

General

Communications: 2 wire Plenum rated twisted pair Zonex wire

Enclosure Dimensions: 6 ¼" x 4 ¼" x 1"