


SATouch PROGRAMMABLE COMMUNICATING THERMOSTAT



SUBMITTAL

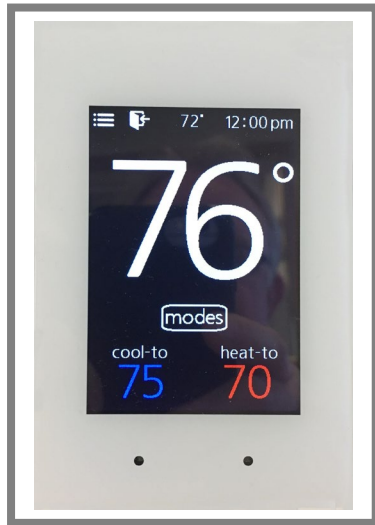

SATouch **Controls Stand Alone units** **Programmable Communicating** **Gas/Electric / Heat Pump Thermostat**

DESCRIPTION

The Zonex Systems **SATouch** is a microprocessor based, auto changeover, touch screen programmable communicating standalone thermostat. The universal standalone communicating thermostat operates and communicates with our GEN II system.

The SATouch is quite easy to configure for Gas/ Elec (2-stage Cool / Heat) or Heat Pump (2-stage Cool / 3-stage Heat) configuration. The SATouch is hard wired to the unit and communicates back to the control board via the RS-485 communication link.

The SATouch thermostat features an onboard thermistor for precise temperature measurement. In the event of power loss, the Heat and Cool set points are stored in a non-volatile memory, without the need for battery backup.

The ambient space temperature is continually displayed with large, easy-to-read numbers. The temperature display range is 45° to 95° F. FAN mode, Heat or Cool set points and operation modes are all indicated on the display.

Programmed set points can be manually adjusted at the thermostat or electronically locked and controlled through a mobile device, to provide limited manual set point adjustment. Two-hour override is provided for after-hours temporary operation with a touch of a button.

TECHNICAL DATA

Electrical:

Supply Voltage: 24vac

Power consumption: 5 VA

Input:

- 24vac
- Humidity/Temperature (0-100% RH) +/-2% RH and +/-0.2 °C

Output:

- 1 x 24vac Bistable Relay
- 6 x 24vac @ 2A Relay's

Communication: RS-485 – Zonex 3 Wire Twisted pair

Environmental:

Operating Temperature: 35° to 130° F (2° to 54° C)

Operating Humidity: 5 to 95% non-condensing

Storage Temperature: 0° to 150° (-18° to 66° C)

General:

Dimensions: 4 1/2" H x 3" W x 3/4" D

Temperature Display Range: 55° to 95° F

Accuracy: +/- 0.8° F

Memory: Non-volatile EEPROM

Display: 320x480 3.5 TFT

Viewing Angle: 140°


Notes:

*Compatible with GEN II

Rev 6/23/20

SATouch PROGRAMMABLE COMMUNICATING THERMOSTAT

TERMINAL FUNCTIONS

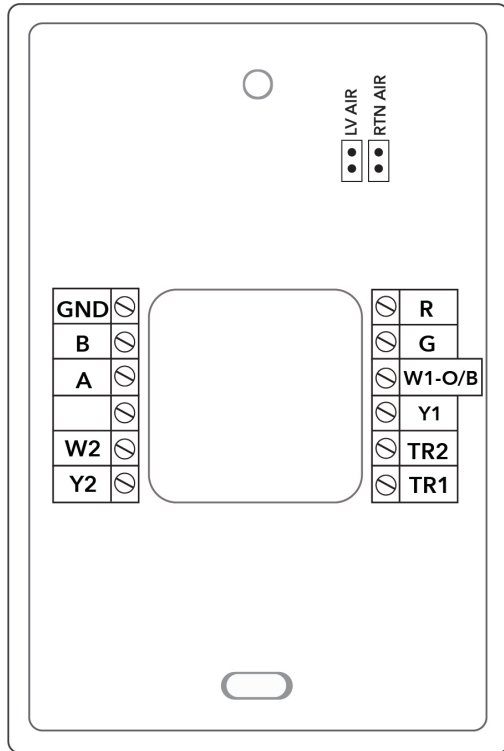

Unit Terminal Block

Y1 - First stage cool
Y2 - Second stage cool
W1 / O/B - First stage heat or Reversing Valve
W2 - Second stage heat
G - Fan
R- 24v from the unit

24v from Independent Transformer

TR1 - 24vac power input - In and Out
TR2 - 24vac power common - In and Out
Use 18 ga. Minimum wire size

Communication Terminal Block

A - Data Transmit - In and Out
B - Data Receive - In and Out
GND - Ground Wire - In and Out
Use Zonex Wire Twisted Pair

Supply and Return Air Terminals

RTN- Return Air
LV- Supply Air

FEATURES

- Full Color Touch Screen Display
- Gas /Elect (2C/2H) or Heat Pump (2C/3H) standalone control
- Emergency Heat operation
- Auto Changeover 7-day Programmable
- Attractive design
- Accurate temperature control
- Electronic Lock feature
- Configurable fan operation for Occupied mode
- F° or C° Temperature Operation
- Auto / Heat only / Cool only / Off operation
- Non-volatile memory: Retains temperature set points
- RS-485 communication
- Temperature Calibration
- Supply and Return Air monitoring