


ZONEXCOMMANDER (PLUS) **A communicating thermal management system**


ZNXPPLUS – Communicating Command Center

Includes: Configured TCIP, Operating Software, Cables and LAT Sensor


NUMBER OF THERMOSTATS / DEVICES

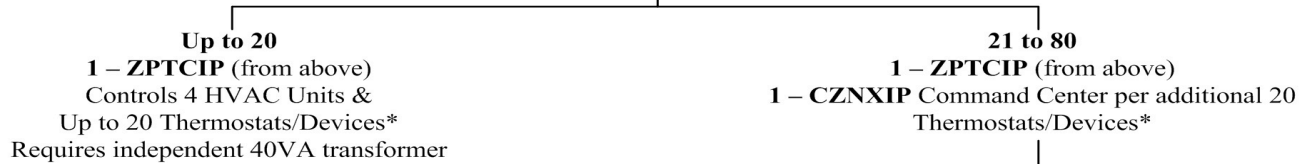

NUMBER OF ZONED UNITS

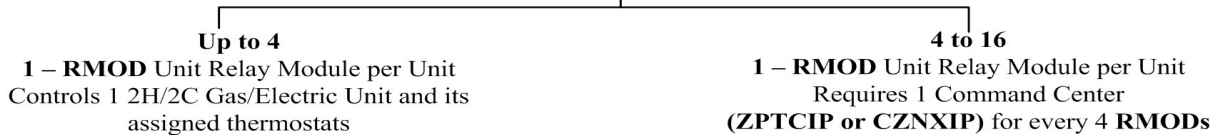

THERMOSTATS

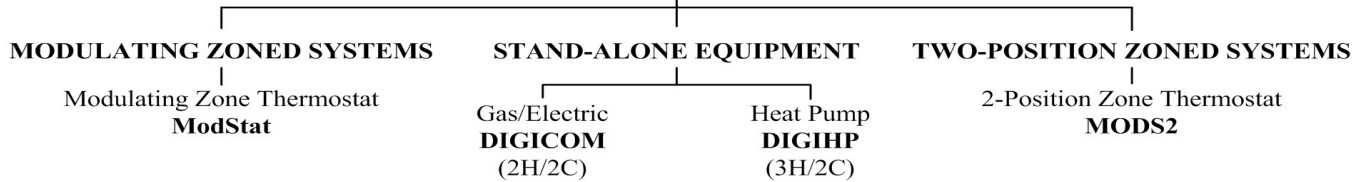

ZONE DAMPERS



BYPASS DAMPERS



COMMUNICATING ACCESSORIES (Optional)



***Devices** include Part #s: **ModStat**, **MODS2**, **DIGICOM**, & **DIGIHP** thermostats and **RLYCOM**.
 Each Command Center supports up to 20 thermostats. If multiple **RMODs** are utilized, the 20 thermostats must be allocated among the 1-4 **RMODs** per Command Center.