


ZonexCommmander (Plus) CONCEPT DRAWING



Designed to centralize control of multiple constant volume VAV systems

Communicate remotely or on-site with G/E or HP, stand-alone rooftop units and zone systems. The ZonexCommander Plus displays S/A and R/A temperatures and controls and schedules external devices such as exhaust fans, parking lot lights, etc., through the RELAYCOM, all located on our unique 2-wire communications link.

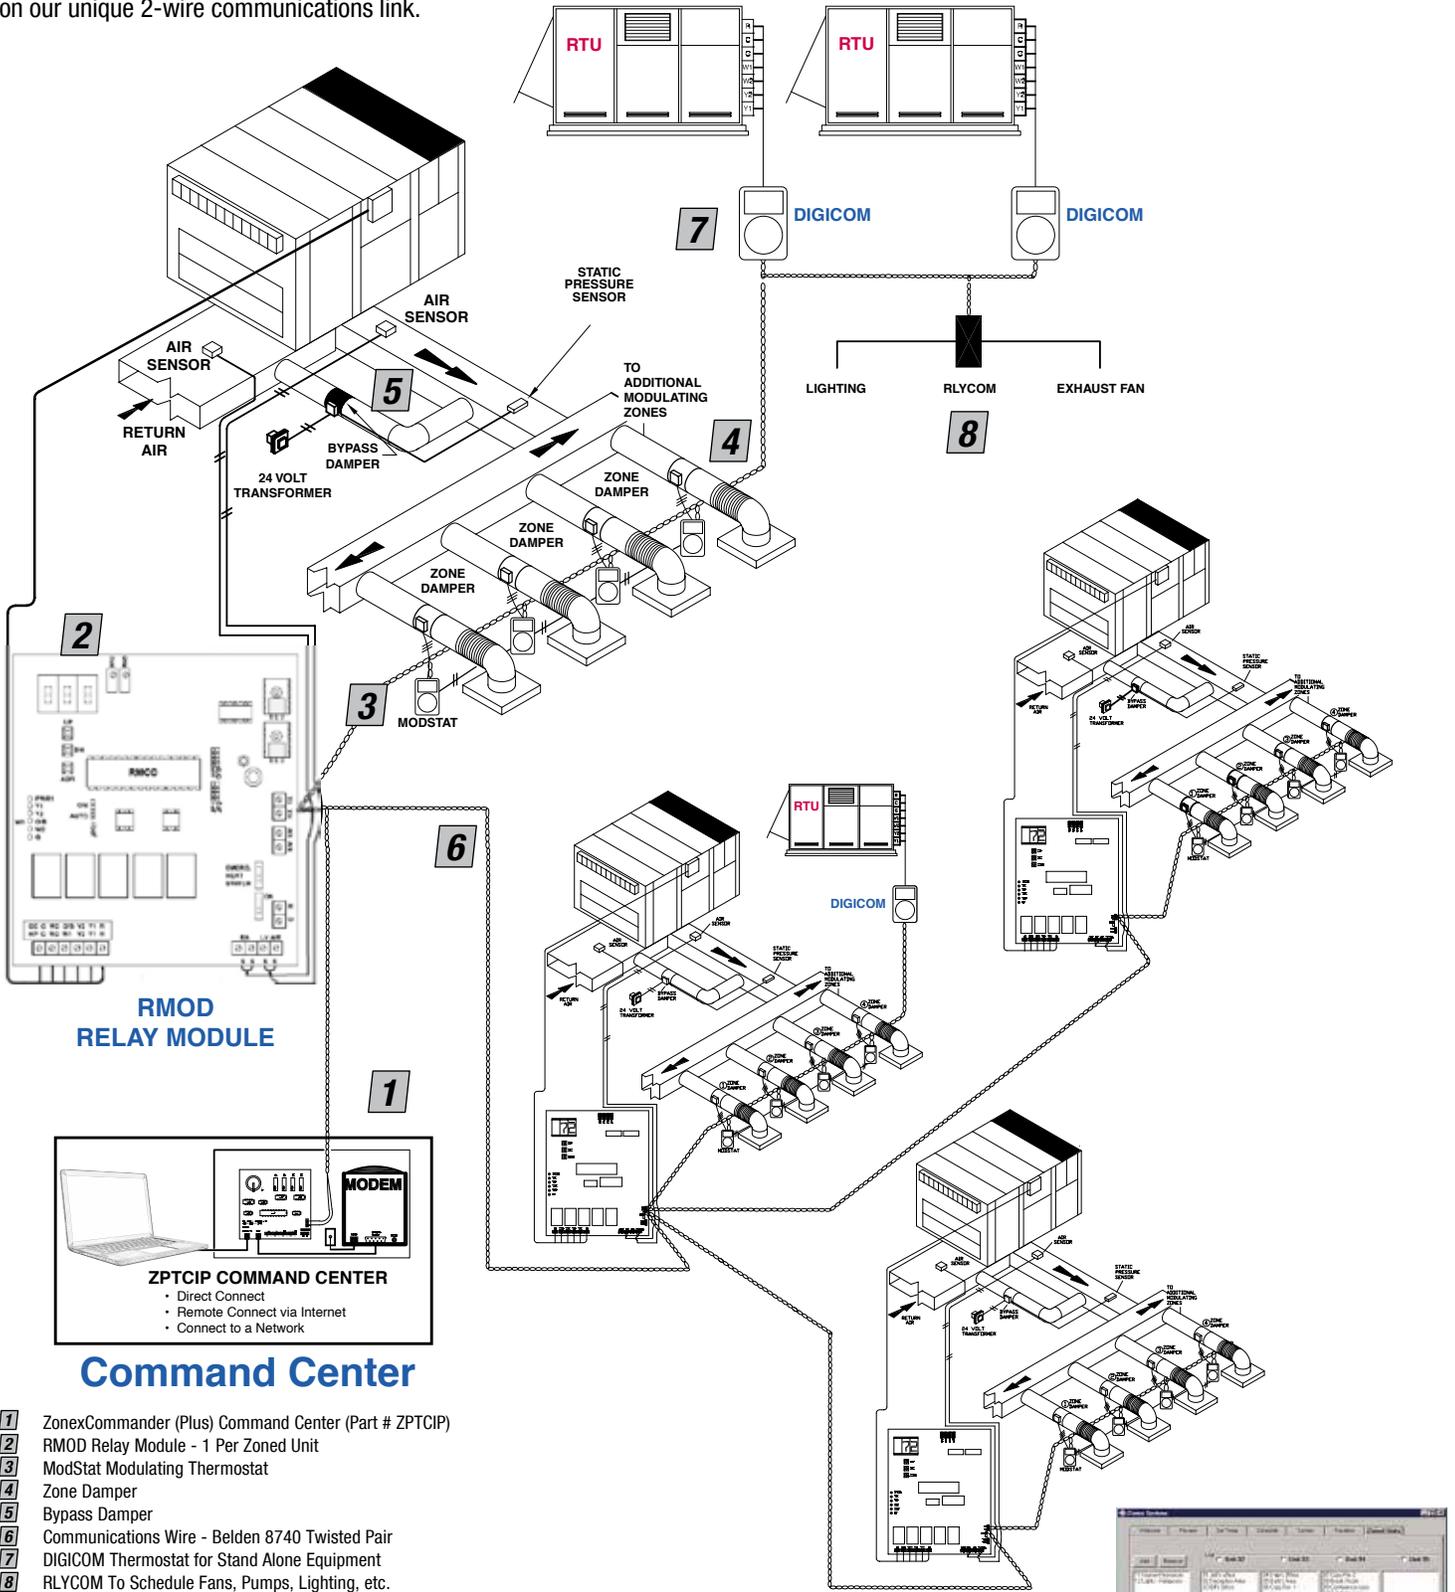

Command Center

- 1 ZonexCommander (Plus) Command Center (Part # ZPTCIP)
- 2 RMOD Relay Module - 1 Per Zoned Unit
- 3 ModStat Modulating Thermostat
- 4 Zone Damper
- 5 Bypass Damper
- 6 Communications Wire - Belden 8740 Twisted Pair
- 7 DIGICOM Thermostat for Stand Alone Equipment
- 8 RLYCOM To Schedule Fans, Pumps, Lighting, etc.

The ZNXPLUS Command Center provides a central source for communication and control of up to 4 relay modules with 20 modulating zones and control of up to 4 2H/2C HVAC systems. Up to 3 additional Command Centers (CZNX) can be added for control of 16 zoned units and 80 thermostats or devices. The Command Center stores system information and scheduling in its non-volatile memory.

Thermostats are assigned to their respective relay module and its corresponding HVAC unit from the zoned units page.

